




Model 3024 Series

The Ultimate Static Eliminator for Machinery Manufacturers

APPLICATIONS

- Slitting
- Rewinding
- Injection Molding
- Printing

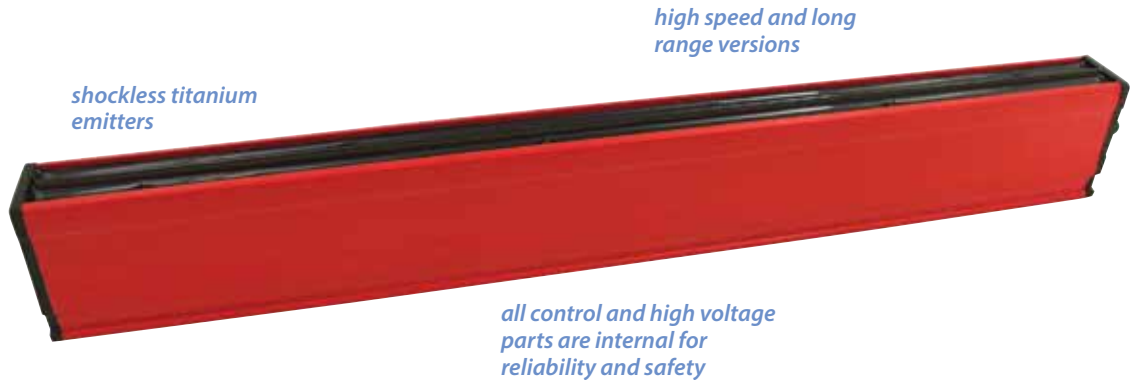

BENEFITS


- Increase production speeds
- Increase profits
- Reduce rejects
- Reduce downtime
- Enhance product quality
- Enhance operator safety

The Model 3024 is a compact unit with built-in electronics and powerful static neutralization performance that meets the requirements of high performance machinery.

- Integrated high voltage power supply, requires only a low voltage 24V DC input
- Shockless, resistively coupled emitters made in tungsten for unlimited life
- LED status indication – Bar OK (green), fault (red)
- Built-in remote monitor for operational status
- 100% coverage; no dead zone
- Available in two versions:
 - Model 3024-F is a high speed version for speeds up to 1000m/min (3280ft/min) and distances from 25mm to 100mm (.98" - 3.94")
 - Model 3024-L is a long range version for distances from 100mm to 500mm (3.94" to 19.69")



Specifications

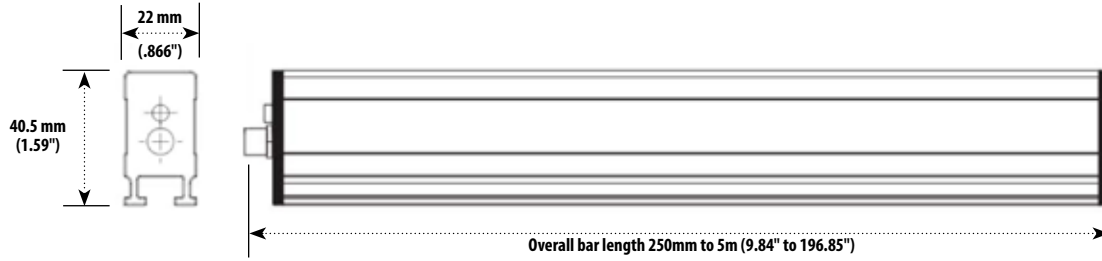

ELECTRICAL SUPPLY: 24V DC (21-28V), 0.5 Amp max.;
M8 connector

REMOTE MONITOR: Sends 0V or 24V signal to the PCL or other destination; this voltage is taken from the power to the bar - no additional power source is needed

HIGH VOLTAGE SUPPLY: 9kV supply integrated into bar

CONSTRUCTION: FR-ABS industrial grade extrusion, epoxy resin

PROTECTION CLASSIFICATION: IP66; fully sealed

ENVIRONMENT: -10 to 55°C (14° - 131°F),
70% rH non-condensing

OPTIONS: 90-250V AC power supply

WEIGHT: 1.1 kg/m (2.43 lbs.)

MOUNTING: Versatile mounting blocks which slide in slot in bottom of extrusion; M6 nylon bolts supplied with each mounting block – two mounting blocks for bars up to 1m (39.37"), three for bars over 1m (39.37"), four for bars over 2m (78.74").



MODEL 3024 F

- Designed to handle speeds in excess of 1000m/min (3280ft/min)
- Ideal for fast moving materials
- Minimum length 250mm (9.84"), available in 50mm (1.97") steps to 5m (196.85")
- Operating distance for best performance 25 - 60mm (.98" - 2.36")

MODEL 3024 L

- Designed to handle distances from 100mm (3.94") to 500mm (19.69")
- Ideal for applications with changing geometry
- Minimum length 300mm (11.81"), available in 100mm (3.94") steps to 5m (196.85")
- Operating distance 100 - 500mm (3.94" - 19.69")

EXPERT TECHNICAL ASSISTANCE • 2 YEAR LIMITED WARRANTY

TAKK INDUSTRIES INCORPORATED

8665 E. Miami River Rd. Cincinnati, OH 45247 USA | www.takk.com | Phone: (800) 792-8255 or (513) 353-4306 | Fax: (513) 353-4315 | service@takk.com